



Epson PowerLite® 74c

XGA performance and extraordinary quality.

For ultra bright XGA performance, the sleek Epson PowerLite 74c provides the ideal solution, with 2000 ANSI lumens, user-friendly features, and renowned Epson reliability. Epson 0.7" high-aperture LCDs work with the projector's remarkable brightness to deliver accurate color and incredible image quality.

This travel-friendly unit boasts a quick start-up time to avoid delays and make presentation setup easier than ever. To discourage theft, there's even a power-on security function which prevents unauthorized use. And, it offers incredible connectivity to accommodate multiple sources without a switcher. This innovative performer also provides two brightness settings for more cost effective operation. With such remarkable versatility, the Epson PowerLite 74c delivers the quality and flexibility required for critical presentations.

Ultra bright 2000 ANSI lumens, weighs only 6.4 lb

- Incredible brightness from a sleek, travel-friendly projector
- Even works in well-lit rooms or presentations with large audiences

Superior image quality and performance

- Three Epson 0.7" high-aperture LCDs for greater color depth and color accuracy
- XGA (1024 x 768) resolution for sharp, vivid images
- 500:1 contrast ratio for remarkable clarity and detail

Easy setup and operation

- Power-on beep lets you know the projector has received your command
- Quick start-up time reduces pre-presentation jitters
- Color-coded cables mean easy connectivity for first-time users
- Flexible connectivity options to accommodate multiple sources without using a switcher (two computer/video inputs, with accompanying audio input)
- Password-protected security feature prevents unauthorized use
- Six projection modes, easily selected via the remote, for optimum performance in any situation
- Monitor out capability so you can display images on a monitor and screen simultaneously
- Automatic keystone correction: $\pm 15^\circ$ digital keystone correction that automatically engages without manual adjustments

- Optical zoom lens for flexible placement and positioning
- Brightness control function accommodates various lighting conditions and room sizes, and can extend the lamp life for more cost-effective operation (3000 hours in Low Brightness mode, 2000 hours in High Brightness mode)
- Fast shut-down time puts you back on the road in no time
- Soft carrying case included

State-of-the-art video performance


- Great connectivity, including component, S-video and composite video
- HDTV-ready; supports 480i, 480p, 720p, and 1080i formats

Outstanding Epson service and support (free for the duration of the two-year warranty)

- 90-day bulb warranty for added dependability
- Epson Road Service Program provides a replacement projector, typically within 24 hours
- Epson PrivateLineSM dedicated toll-free support line available from 6 a.m. to 6 p.m. PST Monday – Friday (Calls are answered live, typically in about a minute.)
- International warranty in over 45 countries



Front View

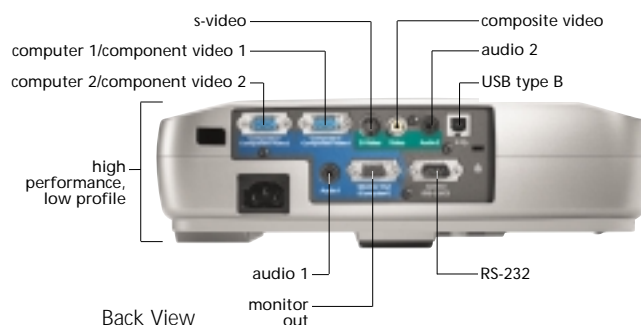

Back View

Epson PowerLite 74c Specifications

Projection System		Epson original LCD technology
Projection Method		Front/rear/ceiling mount
LCDs		
Size	0.7"	
Driving method	Epson high-temperature Poly-silicon TFT Active Matrix	
Pixel number	786,432 dots x 3 (1024 x 768) LCDs	
Native resolution	XGA	
Aspect ratio	4:3 (supports 16:9, 5:4)	
Pixel arrangement	Stripe	
Projection Lens		
Type	Manual: zoom/focus	
F-number	1.70 - 1.87	
f-number	21.3 - 25.6mm	
Zoom ratio	1.0:1.2	
Lamp		
Type	200W UHE	
Life* (typical)	2000H (High Brightness), 3000H (Low Brightness)	
Screen Width Ratio (Distance/Width)		1.48 to 1.71:1
Screen Size (Projected Distance)		30" to 300" (0.9m to 10.5m)
Keystone Correction		Vertical: ±15 degrees, Auto Keystone Correction
Brightness (Typical)		2000 ANSI lumens, 1500 ANSI lumens (Low Brightness)
Contrast Ratio (High Brightness)		500:1
Brightness Uniformity (Typical)		85%
Color Reproduction		24 bit; 16.7 mil
Audio Output		1W Monaural
Operating Temperature		41°F to 95°F (5°C to 35°C)
Power Supply Voltage		100-120V/200-240V ±10%, 50/60Hz AC
Power Consumption		280W, 3W at sleep mode
Dimensions (Includes lens and feet)		9.45" x 12.41" x 3.43"
Dimensions (Excludes lens and feet)		9.45" x 12.41" x 3.82"
Weight		6.4 lb/2.9kg
Fan Noise		38db, 33db (Low Brightness)
Effective Scanning Frequency Range		
Pixel clock	13.5MHz to 162MHz	
Horizontal	15KHz to 92KHz	
Vertical	50Hz to 85Hz	
Remote Control		
Features	Keystone, source selection, power, page up/ page down, color mode, zoom, a/v mute, freeze	
Operating angle	Right/Left ± 30 degrees Upper/Lower ± 15 degrees	
Operating distance	20 ft (6m)	
RGB		Analog RGB I/O
Display performance		
Native	1024 x 768	
Resize	1600 x 1200 1280 x 1024 800 x 600 640 x 480	
Input terminal		
Video	Mini D-sub 15 pin x 2	
Audio	Stereo mini jack	
Output terminal		
Video	Mini D-sub 15pin (monitor out)	

Video I/O	
Display performance	NTSC: 550 line PAL: 550 line (depends on observation of the multi burst pattern)
Input signal	NTSC/NTSC4.43/PAL/M-PAL/ N-PAL/PAL60/SECAM HDTV: 480i, 480p, 720p, 1080i
Input terminal	
Video	Composite video: RCA (Yellow) x 1 S-Video: Mini DIN Component video: Mini D-sub 15pin (in common with Analog RGB connector) x 2; Video-RGB: Mini D-sub 15pin (in common with Analog RGB connector) x 2
Audio	Stereo mini jack
Audio signal	500m Vrms/47Kohm

Control I/O	
I/O terminal	USB connector type B Serial: Mini D-sub 9pin, RS-232C
Security	
Kensington®-style lock provision	

Supplied Accessories

Power cable, card type remote control with lithium battery, computer cable, RCA video cable, USB A/USB B Mouse Cable, Start Here Kit, soft carrying case

Product/Accessory Part Numbers

Epson PowerLite 74c Projector	V11H136020
Replacement lamp	V13H010L27
Air Filter Set	V13H134A05
Replacement remote control	V12H007T13
Samsonite wheeled soft case for projector and laptop	ELPKS35-S
Samsonite Notebook/projector soft shoulder bag	ELPKS43
ATA molded hardshell case	ELPKS45
Ceiling mount	ELPMB39
Suspension adapter	ELPMBAPL
False ceiling plate	ELPMBFCP
Component video cable	ELPKC19
S-Video cable	ELPSV01
Mac adapter set	ELPAP01
50" portable screen	ELPSC06
60" portable pop-up screen	ELPSC07
80" portable pop-up screen	ELPSC08
High resolution document imager	ELPDC02
High resolution document camera	V12H064020
Kensington security lock	ELPSL01

Warranty

Two-year limited warranty, 2-year international warranty, 90-day lamp warranty, Epson Road Service Program and Epson PrivateLine dedicated toll-free support (U.S. and Canada only)

Support-The Epson ConnectionSM

Pre-Sales Support U.S. and Canada	800-463-7766
Automated Technical Support	800-922-8911
Internet Web Site	www.epson.com



presentersonline.com

*Lamp life results will vary depending upon mode selected, environmental conditions, and usage.

EPSON®

Epson America, Inc.
3840 Kilroy Airport Way, Long Beach, CA 90806

Epson Canada, Ltd.
3771 Victoria Park Avenue, Toronto, Ontario M1W 3Z5

Specifications and terms are subject to change without notice. Epson is a registered trademark of Seiko Epson Corporation. PowerLite is a registered trademark, SizeWise is a trademark, and Epson Connection, PrivateLine and Presenters Online are service marks of Epson America, Inc. All other product and brand names are trademarks and/or registered trademarks of their respective companies. Epson disclaims any and all rights in these marks. © Copyright 2003 Epson America, Inc. CPD-16544R1 15K 9/03 CL

Printed on Recycled Paper ♻️